INOXTREND®



Nice & Go



CUTTING EDGE SOLUTIONS
FOR SMART PROFESSIONAL
OVENS

TECHNOLOGY AT YOUR SERVICE

Any user's needs and desires will find a solution in the wide choice of Inoxtrend models, assuring a tasty, healthy and creative cooking, leaving way to imagination and skill.

Our philosophy is based on the cooperation with international top chefs and a very carefully engineered job in R&D.

Our in-house dedicated laboratory represents the heart of the company's creativity and reliability. Inoxtrend develops professional combi and convection ovens with essential qualities as durability, safety and efficiency.

MANIAC IN EXCELLENCE

Reliability and sturdiness at everyone's service.

Professional ovens for large and small catering businesses, conceived for ever more demanding chefs who follow the transformation of taste and the quality of an authentic **Made in Italy product**.

Gastronomy and pastry users find a professional response in Inoxtrend product ranges. The chef only needs to choose his oven: convection, combi direct or with boiler with analog, digital or touch-screen control panel.

The ranges:



Gourmet

The cooking device becomes your true **partner in the kitchen**. Combi ovens with direct steam generator, gas and electric available from **6 to 20 levels**. The perfect match of design and technology to obtain the most advanced cooking results with minimum effort.



Professional

Meaning **reliability and high productivity**. Gas and electric professional ovens, available from **4 to 20 levels** for heavy duty use. A direct steam injection that assures high quality results in any type of traditional recipes for the kitchens of the world.



Nice & Go

The best performances in a compact and slick design. Electric and gas ovens available from **5 to 12 levels**, with a spacious and high performing cooking chamber.



Snack

The ideal range for snack bars or food trucks that need a small oven to heat up or cook croissants, pastry, bread or simple dishes.











Mod. NG-SP-012G

Door with double glass

Light: internal lighting

Gasket: easy to remove door gasket made of silicone rubber for professional use

Magnetic door switch to stop ventilation

Fan engine: autoreverse / 2 speed fans

Steam release valve

Cooking modes:

- · convection with humidification
- convection with steam
- · combi with direct steam



	Description	Code	Compatible with capacities
	Stand in stainless steel	SCAG-11-NG8	05-07 levels
	with trayholders	SCAG-11-NG7	12 levels
	Static prover, 8 + 8 levels H goo mm Temperature range 0-60 °C	LS-088E-P	05-07 levels
	Static prover 6 + 6 levels H 700 mm Temperature range 0-60 °C	LS-066E-P	12 levels









HIGHLIGHTS



6

ANALOG CONTROL PANEL

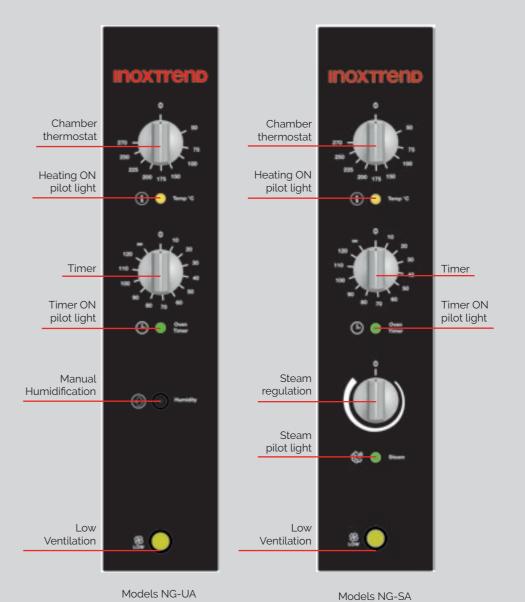

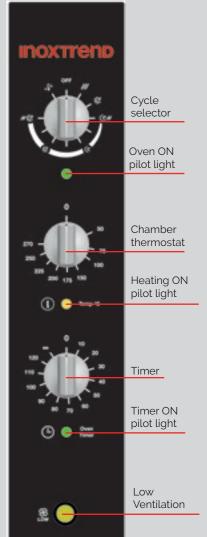

Models NG-DA

HIGHLIGHTS




Ergonomic door handle.

8

Digital control panel with **99 programs**, **four phases** and **direct steam regulation** to set in 6 positions.


PROGRAMMABLE CONTROL PANEL

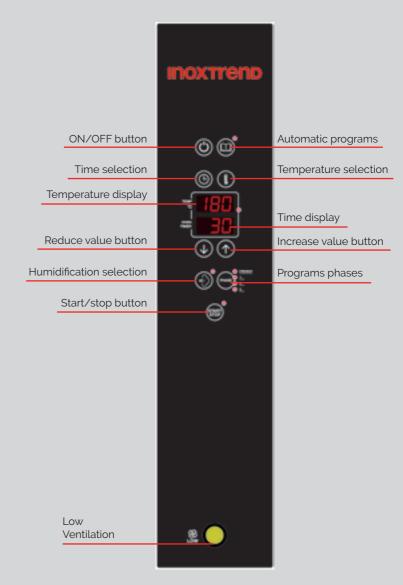

Models NG-SP

9

HIGHLIGHTS

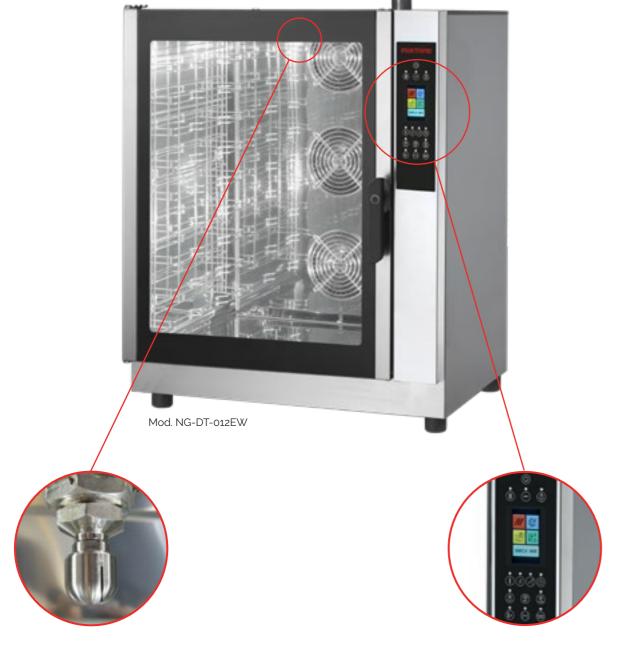


Automatic chamber washing system with liquid detergent.

10

Simple, efficient and intuitive Touch Screen control panel.

TOUCH SCREEN CONTROL PANEL

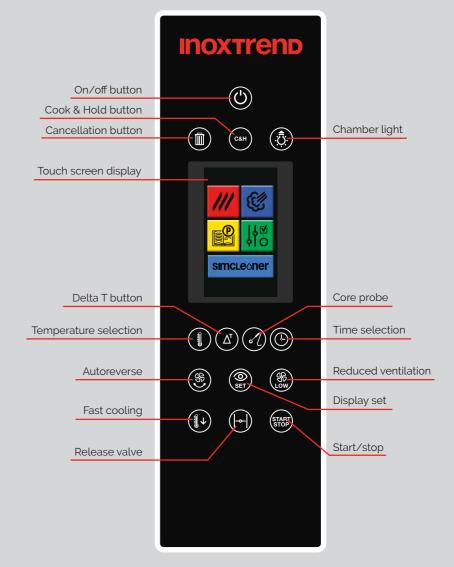

Models NG-DT

11













	Oven model NG-UA		NG-SA NG-DA		NG-SP	NG-DT	
	Control panel	Analog	Analog	Analog	Programmable	Touch Screen	
	Convection with ventilation	50-270 °C	50-270 °C	50-270 °C	50-270 °C	30-270 °C	
(% (5)	Convection with humidification	Standard	-	-	-	-	
(Max)	Convection with steam	-	Standard	-	Standard	-	
(<u> </u> =)	Combi with direct steam	-	-	50-270 °C	-	30-270 °C	
(\$)	Steam	-	-	50-100°C	-	20-100 °C	
L%H	Double ventilation speed	Standard	Standard	Standard	Standard	Standard	
	Autoreverse	Standard	Standard	Standard	Standard	Standard	
1	Core probe	Not available	Not available	Not available	Not available	Standard	
$\triangle T$	Delta T	Not available	Not available	Not available	Not available	Standard	
P	Automatic programs	Not available	Not available	Not available	99 programs 4 phases	300 programs 6 phases	
PRH	Automatic preheating	Not available	Not available	Not available	Standard	Standard	
IICD TH	USB connection	Not available	Not available	Not available	Not available	Standard	
4000	Automatic washing	Not available	Not available	Not available	Not available	With liquid detergent (see model chart)	



Power supply	Capacity	Dimensions [mm]	Cooking mode	Control panel	Power [kW]	Voltage	Hz	Model	
	05 × 600 × 400 mm • 05 × 1/1 GN Pitch: 67 mm	765	U (S)	A Analog	6,5	400V 3N	50/60	NG-UA-005EW	W Powered
				A Analog	6,5	400V 3N	50/60	NG-SA-005EW	W Powered
			S (M) CONVECTION WITH STEAM	P Programmable	6,5	400V 3N	50/60	NG-SP-005EW	W Powered
				A Analog	6.5	400V 3N	50/60	NG-DA-005EW	W Powered
			D (SE)	Touch Covers	6,5	400V 3N	50/60	NG-DT-005EW	W Powered
				T Touch Screen	6,5	400V 3N	50/60	NG-DT-005EWL	WL Powered + Chamber Washing
	07 X 600 X 400 mm + 07 X 1/1 GN Pitch: 67 mm	905	U CONVECTION WITH HUMIDIFICATION	A Analog	11,5	400V 3N	50/60	NG-UA-007EW	W Powered
(F)			(%)	A Analog	11,5	400V 3N	50/60	NG-SA-007EW	W Powered
ELECTRIC			S (M) CONVECTION WITH STEAM	P Programmable	11,5	400V 3N	50/60	NG-SP-007EW	W Powered
				A Analog	11.5	400V 3N	50/60	NG-DA-007EW	W Powered
			D COMBI WITH DIRECT STEAM	T Touch Screen	11,5	400V 3N	50/60	NG-DT-007EW	W Powered
				i loudi scieen	11,5	400V 3N	50/60	NG-DT-007EWL	WL Powered + Chamber washing
	12 × 600 × 400 mm + 12 × 1/1 GN Pitch: 67 mm	7775	U SSO CONVECTION WITH HUMIDIFICATION	A Analog	17.3	400V 3N	50/60	NG-UA-012EW	W Powered
			S (Max) CONVECTION	A Analog	17.3	400V 3N	50/60	NG-SA-012EW	W Powered
			S CONVECTION WITH STEAM	P Programmable	17.3	400V 3N	50/60	NG-SP-012EW	W Powered
				A Analog	17.3	400V 3N	50/60	NG-DA-012EW	W Powered
			D COMBI WITH DIRECT STEAM	T Touch Screen	17.3	400V 3N	50/60	NG-DT-012EW	W Powered
				T Touch Screen	17.3	400V 3N	50/60	NG-DT-012EWL	WL Powered + Chamber washing

Power supply	Capacity	Dimensions [mm]	Cooking mode	Control panel		Power [kW]	Voltage	Hz	Model	
		785	U SONVECTION WITH HUMIDIFICATION	A Analog		10	230V 1N	50°	NG-UA-005G	
			s (sž	A Analog		10	230V 1N	50*	NG-SA-005G	
			S (\$\frac{\lambda}{\pi}\rangle}\) CONVECTION WITH STEAM	P Programmable		10	230V 1N	50°	NG-SP-005G	
	05 X 600 x 400 mm * 05 x 1/1 GN Pitch: 67 mm			A Analog		10	230V 1N	50*	NG-DA-005G	
			D COMBI WITH DIRECT STEAM	T Touch Screen		10	230V 1N	50°	NG-DT-005G	
				T Touch Screen		10	230V 1N	50*	NG-DT-005GL	L Chamber washing
	07 × 600 × 400 mm + 07 × 1/1 GN Pitch: 67 mm	925	U SONVECTION WITH HUMIDIFICATION	A Analog		16	230V 1N	50*	NG-UA-007G	
			s (§\$)	A Analog		16	230V 1N	50°	NG-SA-007G	
GAS GAS			S (\$\frac{\fin}}}}}{\frac{\fir}}}}}{\fira}}}}}}}}}{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\fi	P Programmable		16	230V 1N	50°	NG-SP-007G	
				A Analog		16	230V 1N	50°	NG-DA-007G	
			D COMBI WITH DIRECT STEAM	T Tauch Carean	Touch Screen	16	230V 1N	50°	NG-DT-007G	
				T Touch Screen		16	230V 1N	50°	NG-DT-007GL	L Chamber washing
	12 × 600 × 400 mm • 12 × 1/1 GN Pitch: 67 mm	1245	U SONVECTION WITH HUMIDIFICATION	A Analog		19,5	230V 1N	50°	NG-UA-012G	
			(§)	A Analog		19,5	230V 1N	50°	NG-SA-012G	
			S (\$\frac{\lambda}{\psi}\frac{\lambda}{\psi}ONNECTION WITH STEAM	P Programmable		19,5	230V 1N	50°	NG-SP-012G	
				A Analog		19,5	230V 1N	50°	NG-DA-012G	
			D COMBI WITH DIRECT STEAM	T Touch Corner		19,5	230V 1N	50°	NG-DT-012G	
				T Touch Screen		19,5	230V 1N	50°	NG-DT-012GL	L Chamber washing

*60 Hz available upon order

TRAYS AND GRIDS

Contoured enameled tray



Spare ribs grid

20



Aluminium Silverstone tray



Potato baking tray



Frying basket



Non-stick grid



Eggs tray



Baguette tray GN



Chicken spike



Perforated bread baking tray

INOXTREND®

A REFERENCE IN HIGH QUALITY PROFESSIONAL OVENS MADE IN ITALY

Inoxtrend was founded in 1989 in the heart of the North-East Italian region, where several small and medium-sized enterprises skillfully specialized in manufacturing stainless steel products.

It immediately stood out for its attention towards specialization and its continuous research to find the best solution for every professional kitchen.

Inoxtrend ovens are the ideal solution for **restaurants**, **hotels**, **bars**, **delis**, **bakeries**, **pastry-shops** and **pizzerias**.





INOXTREND SRL
Via Serenissima, 1
31025 S.LUCIA DI PIAVE (TREVISO) - ITALY
Tel. +39.0438.456990 - Fax +39.0438.451710
Email: info@inoxtrend.com